

Technical data sheet


Combination arrestor, 3-pole + NPE



V 25-B+C/...: Combination arrestor set, lightning and surge arrestor
Type 1+2 to DIN EN 61643-11 (B+C to VDE 0675 Part 6).

- With new Multibase base with multi connection terminals
- Complete unit consisting of cover and base, pre-mounted and ready for connection
- Suitable for any TN-S and TT systems
- Plug-in arrestor with dynamic isolating device
- Visual function display
- Protection level • Encapsulated non-extinguishing zinc oxide varistor arrestor for use in standard distributor housings
- Marked connections

Application example: Building with open-wire power supply or for setting up lightning protection equipotential bonding in residential buildings.

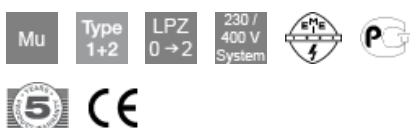

Type	Max. continuous operating voltage V	Version	Pack. pcs	Weight kg/100 pcs.	Art.-No.
V25-B+C 1+NPE	280	1-pole complete with NPE	1	28.000	5094457
V25-B+C 2+NPE	280	2-pole complete with NPE	1	37.000	5094460
V25-B+C 3+NPE	280	3-pole complete with NPE	1	51.000	5094463

/pc.

Authorized Channel Partner

