




Applications: From private housing with junction boxes up to industrial applications in the distributor cabinet. Temperature range: -20 °C to +65 °C.

Pack.	Weight	Item No.
pcs	kg/100 pcs.	

V-TEC VM12 LGR	Light grey	50	0,318	2022862
V-TEC VM16 LGR	Light grey	50	0,638	2022864
V-TEC VM20 LGR	Light grey	50	0,856	2022866
V-TEC VM25 LGR	Light grey	25	1,360	2022868
V-TEC VM32 LGR	Light grey	20	2,235	2022870
V-TEC VM40 LGR	Light grey	10	3,467	2022872
V-TEC VM50 LGR	Light grey	5	5,466	2022874
V-TEC VM63 LGR	Light grey	5	8,306	2022876

Dimensions

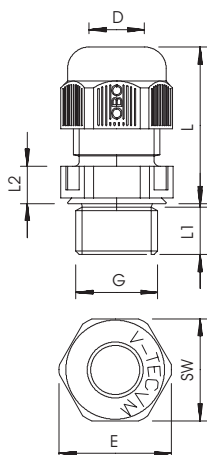

Type	Thread	Sealing range D mm	SW mm	Dimen- sion E mm	Dimen- sion L min. mm	Dimen- sion L max. mm	Dimen- sion L1 mm	Dimen- sion L2 mm	Instal- lation torque Nm
V-TEC VM12 LGR	M12 x 1,5	3,5-7	15	16,5	18,5	23,5	8	5	2
V-TEC VM16 LGR	M16 x 1,5	4,5-10	20	22	21,5	23,5	8	5	2
V-TEC VM20 LGR	M20 x 1,5	6-13	24	27	23,5	30,5	9	5	3,8
V-TEC VM25 LGR	M25 x 1,5	9-17	29	32	26	35	10	6	5
V-TEC VM32 LGR	M32 x 1,5	15-21	36	41	29	40	11	6	7,5
V-TEC VM40 LGR	M40 x 1,5	16-28	44	50	36	46	11	7	10
V-TEC VM50 LGR	M50 x 1,5	23-35	54	60	43	52	12	8	12
V-TEC VM63 LGR	M63 x 1,5	36-48	67	75	48	60	12	9	15



INFINITE
ENGINEERING