

Clamp clip, double, plastic pressure trough FT



Suitable for all C profile rails with slot width 16–17 mm.


Hot-dip galvanised steel clip and bolt, polypropylene pressure trough, halogen-free, colour light grey RAL 7035.

Type	Clamping range D mm	Pack. pcs	Weight kg/100 pcs.	Item No.	Item No.
2056 2 12 FT	8-12	50	4,100	1161121	1507009
2056 2 16 FT	12-16	50	4,650	1161164	
2056 2 22 FT	16-22	50	5,120	1161229	
2056 2 28 FT	22-28	50	7,700	1161288	
2056 2 34 FT	28-34	50	10,200	1161342	
2056 2 40 FT	34-40	50	11,450	1161407	
2056 2 46 FT	40-46	50	14,900	1161466	1507016
2056 2 52 FT	46-52	50	16,700	1161520	
2056 2 58 FT	52-58	50	21,400	1161571	
2056 2 64 FT	58-64	50	24,250	1161644	

2056 2 22 A2	16-22	50	5,150	1161822	
2056 2 28 A2	22-28	50	7,700	1161830	
2056 2 34 A2	28-34	50	10,200	1161849	
2056 2 40 A2	34-40	25	14,350	1161857	
2056 2 46 A2	40-46	25	14,950	1161865	
2056 2 52 A2	46-52	25	16,700	1161873	
2056 2 58 A2	52-58	25	21,400	1161881	
2056 2 64 A2	58-64	15	24,250	1161903	

2056 2 12 ALU	8-12	50	1,000	1183389	
2056 2 16 ALU	12-16	50	1,250	1183397	
2056 2 22 ALU	16-22	50	1,500	1183400	
2056 2 28 ALU	22-28	50	2,000	1183419	
2056 2 34 ALU	28-34	50	3,200	1183427	
2056 2 40 ALU	34-40	50	3,750	1183435	
2056 2 46 ALU	40-46	50	4,850	1183443	
2056 2 52 ALU	46-52	50	5,300	1183451	
2056 2 58 ALU	52-58	50	6,000	1183478	

Dimensions

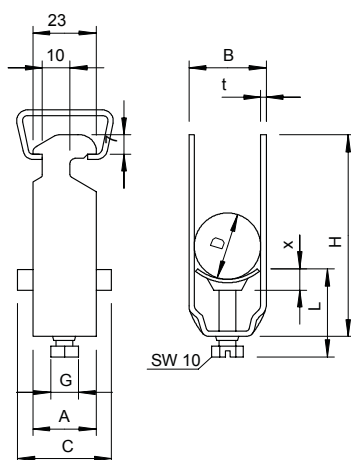

Type	Clamping range D mm	Dimension A mm	Dimension B mm	Dimension C mm	Dimension G mm	Dimension t mm	Dimension x mm	Dimension H mm	Dimension L mm	Max. torque Nm
2056 2 12 FT	8-12	23	16	34	M6	1,5	4,5	52	34	3
2056 2 16 FT	12-16	23	20	34	M6	1,5	4,5	61	34	3
2056 2 22 FT	16-22	23	27	34	M6	1,5	5	73	47	3
2056 2 28 FT	22-28	23	33	34	M6	2	5	87	47	3
2056 2 34 FT	28-34	23	39	34	M8	2	6	101	44,5	5
2056 2 40 FT	34-40	23	45	34	M8	2	6	114	44,5	5
2056 2 46 FT	40-46	23	51	40	M8	2	6	129	44,5	5
2056 2 52 FT	46-52	23	57	40	M8	2	6,5	129	45,5	5
2056 2 58 FT	52-58	23	64	40	M8	2,5	6,5	154	45,5	5
2056 2 64 FT	58-64	23	70	40	M8	2,5	6,5	167	44,5	5
2056 2 22 A2	16-22	23	27	34	M6	1,5	5	73	47	3
2056 2 28 A2	22-28	23	33	34	M6	2	5	87	47	3
2056 2 34 A2	28-34	23	39	34	M8	2	6	101	44,5	5
2056 2 40 A2	34-40	23	45	34	M8	2	6	114	44,5	5
2056 2 46 A2	40-46	23	51	40	M8	2	6	129	44,5	5
2056 2 52 A2	46-52	23	57	40	M8	2	6,5	129	45,5	5
2056 2 58 A2	52-58	23	64	40	M8	2,5	6,5	154	45,5	5
2056 2 64 A2	58-64	23	70	40	M8	2,5	6,5	167	44,5	5

Authorised Channel Partner