

Technical data sheet

US 7 support

Art.-Nr. 6339018



Authorized Channel Partner



Suspended support (U profile) of dimensions 70 x 50 mm with welded head plate.




St	Steel
FT	Hot-dip galvanised

Additional product text, instruction	For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.
--------------------------------------	---

Master data

Item no.	6339018
Type	US 7 K 20 FT
Description 1	Support
Description 2	with welded head plate
Dimension	70x50x200
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit	1,00 Piece
Weight	177,00 kg/100 pc.

Technical data

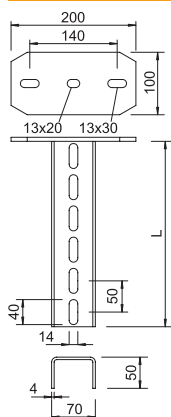

Length	200,00 mm
Width	70,00 mm
Height	50,00 mm
Dimension L	200,00 mm
Dimension	70 x 50 x 4 mm
Version	U profile
Bracket length 200	8,30 kN
Bracket length 400	5,00 kN
Bracket length 600	3,50 kN
EPD article	☒
Suitable for maintaining electrical function	☐
Material thickness	4,00 mm
Rustproof steel, pickled	☐


Technical data sheet

US 7 support

Art.-Nr. 6339018



Technical data

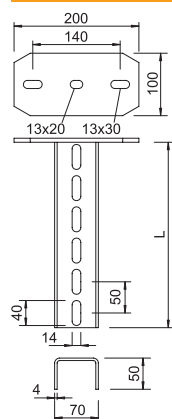

Strain relief
(dependent on the
thickness of the
ceiling profile)

11,00 kN

Technical data sheet

US 7 support

Art.-Nr. 6339018

